

# Pocket Cushion



## Requirements

### **Baby Lock Overlocker Machine**

Machine Needles to suit your Baby Lock Model

Flat Sole Foot

Grooved Foot

3mm Piping Foot

Cushion Back Fabric: 2 pieces 16" x 8 3/4"

Cushion Front Fabric: 16 1/2" x 16"

Cushion Front Pocket Fabric: 2 contrasting pieces 16" x 4 1/2"

Cushion Front Pocket Lining: 16" x 8 1/4"

Front Pocket Ruffle Fabric: 32" x 2"

3mm Grey Piping: 45cm (18")

20" Zipper (colour to match fabric)

Cushion Insert: 40cm x 40cm (Easyrest—Birch)

### **DESIGNER THREADS BY BABY LOCK**

4 x Maxi Lock Overlocker Thread Light Grey (32432)

1 x Cameo Lemon (CM716)

# Creative Method

## Front Pocket Ruffle ~ Rolled Hem:

Set machine up for 3 Thread Rolled Hem using the Maxi Lock in the needle and lower looper, Cameo in the upper looper.

Stitch Selector: D  
Stitch length: 2.0 R  
Stitch Width: M  
Needle: Right  
Differential Feed: N

Attach the Flat Sole Foot

Create a Rolled Hem on one edge of the Pocket Ruffle.



## Cushion Front ~ Flat Lock:

Set machine up for 3 Thread Flat Lock, lift the presser foot and move the needle thread into the upper looper tension (see photos ~ removing thread from the pre-tension guide) leave other threads in the same positions.



Step 1: loop the thread behind the pre-tension guide .

Step 2: then pull loop through the pre-tension guide to release the thread.



Stitch Selector: D  
Stitch Length: 2.0  
Stitch Width: 7.5  
Needle: Right  
Differential Feed: N

Fold the Cushion Front in half wrong sides together on the longer side and stitch down the centre to create the Flat Lock.

NOTE: do not cut the edge with the blade, so use the right needle mark on the front of the presser foot.

Pull the flat stitch out so it sits flat, then fold each side wrong sides together onto the flat lock stitching that you created and press.

Stitch down each of the pressed folds the same way you did for the centre flat lock stitching.





# Creative Method

## Construction :

Set machine up for 4 Thread Overlocking using the Maxi Lock in the needles and loopers.

Insert the left needle.

**Note: remove the right needle thread from the upper looper tension and place in the right needle tension in the same way you moved it for the flat lock stitching.**

Change the settings:                      Stitch Selector: B  
  Stitch length: 3  
  Stitch Width: 6.5  
  Needles: Left & Right  
  Differential Feed: 2

Attach the grooved foot.

Gather the other side of the Pocket Ruffle, you will need allow the fabric freedom to feed so you create a beautiful ruffle.

Change the settings:                      Stitch Selector: A  
  Stitch length: 2.5  
  Stitch width: 7.0  
  Needles: Left & Right  
  Differential Feed: 0.8

Attach the 3mm Piping foot.

Insert the ruffle and piping between the two contrasting front pocket pieces and stitch together.

Change the Differential Feed to N, Stitch Width to 7.5 and attach the flat sole foot.

Stitch the Cushion Pocket Front and Lining together only on the top pocket edge.

Press

Stitch Pocket to the Cushion front on each side and the bottom.




Attach the 5mm Piping Foot (for inserting Zipper)

Insert the zipper between the two Cushion Back pieces, with the right-side of the zipper to the right side of the fabric and raw edges together, stitch the zipper to the first side, then to the other side, make sure not to twist the zipper.

Attach the Flat Sole Foot.

Place your Cushion Front and Back rights-sides together, make sure you open the zipper about 10cm. Stitch around all sides of the Cushion, then turn through.

Press and place the Cushion Insert inside.

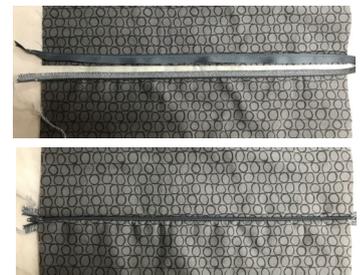

**WOW!**  
**HOW EASY WAS THAT!**

**Thank you and we hope you have enjoyed the Workshop.**  
**FROM THE BABY LOCK TEAM**